


# RADITEK INC.

## Ceramic Band Pass Filter 1080-1240MHz, 3 Watts, Surface Mount RBPF-1080-1240M-3W-S

code-k

1. ELECTRICAL SPECIFICATION.			
Center Frequency (Fo)		1160 MHz	
Band Width (B.W)		1080 MHz ~ 1240 MHz	
NO	CHARACTERISTIC	TYP	SPEC
1	INSERTION LOSS(dB)	Fc=1.8 max.	
2	RIPPLE in BW(dB)	1.0 max.	
3	Return Loss in BW	15 dB min.	
4	IN/OUT IMPEDANCE	50 Ω	
5	ATTENUATION (Absolute Value)	50 dB min.	AT 800MHz
		20 dB min.	AT 1600MHz
		SPEC+DIM □□	
6	In/Out Power	3 W MAX	

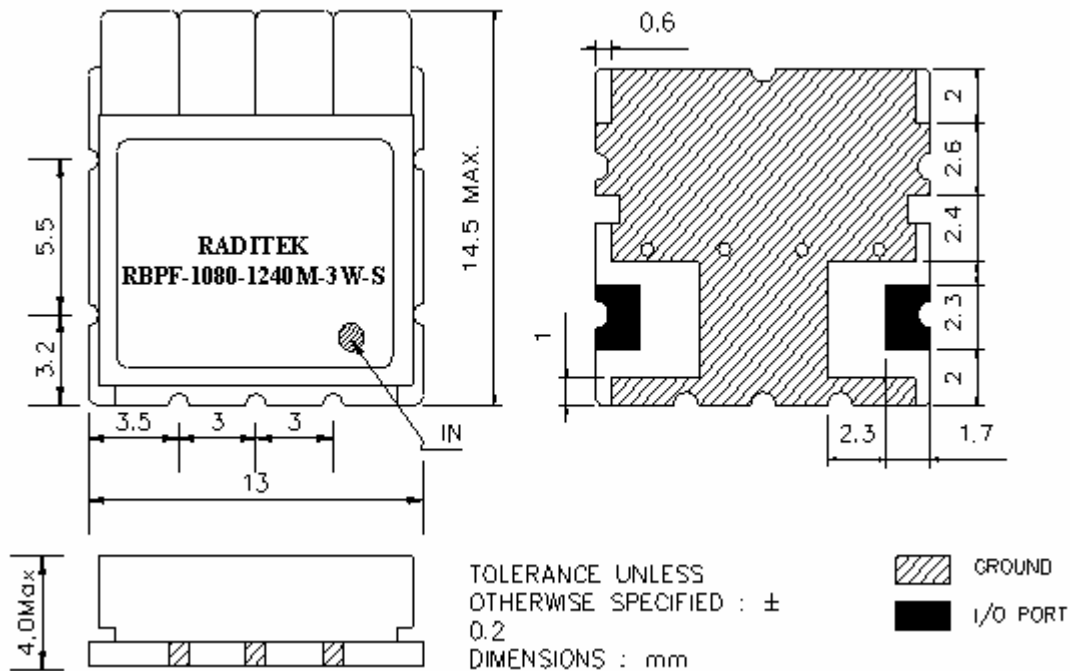

RBPF-1080-1240M-3W-S-k

Specifications may be subject to change

03/28/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: [www.raditek.com](http://www.raditek.com), E-mail: [sales@raditek.com](mailto:sales@raditek.com)