

RADITEK INC.


Ceramic Band Pass Filter 1100-1300MHz, 3 Watts, Surface Mount RBPF-1100-1300M-3W-S

code-k

1. ELECTRICAL SPECIFICATION.

Center Frequency (Fo)		1200 MHz		REMARK
Band Width (B.W)		1100 MHz	~ 1300 MHz	
NO	CHARACTERISTIC	TYP	SPEC	
1	INSERTION LOSS(dB)	1.8 dB max.	2.5 dB max.	
2	RIPPLE in BW(dB)	0.8 dB max.	1.0 dB max.	
3	Return Loss in BW	16.0 dB min.	15.0 dB min.	
4	IN/OUT IMPEDANCE	50 Ω		
5	ATTENUATION (Absolute Value)	30 dB min. AT Fo ±400 MHz		
6	In/Out Power	3 W MAX		

2. DIMENSION

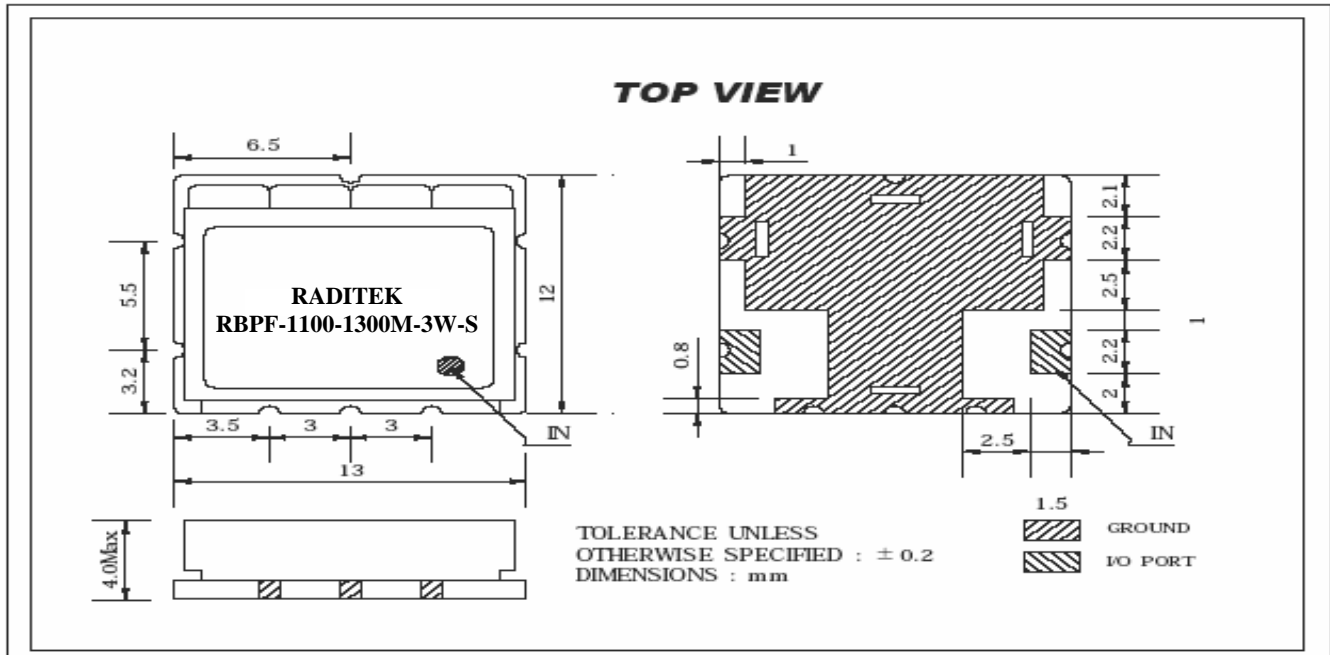

RBPF-1100-1300M-3W-S-k

Specifications may be subject to change

03/28/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com