


RADITEK INC.

Ceramic Band Pass Filter 1100-1360MHz, 3 Watts, Surface Mount RBPF-1100-1360M-3W-S

code-k

1 ELECTRICAL SPECIFICATION

Center Frequency (Fo)		1230	MHz
Band Width (B.W)		1100 MHz ~ 1360	MHz
NO	CHARACTERISTIC	TYP	SPEC
1	INSERTION LOSS(dB)	1.8dB max.	2.5dB max.
2	RIPPLE in BW(dB)	0.8dB max.	1.0dB max.
3	Return Loss in BW	16.0dB min.	15.0dB min.
4	IN/OUT IMPEDANCE	50	Ω
5	ATTENUATION (Absolute Value)	40 dB min.	AT 800MHz
		20 dB min.	AT 1600MHz
6	In/Out Power	3	W MAX

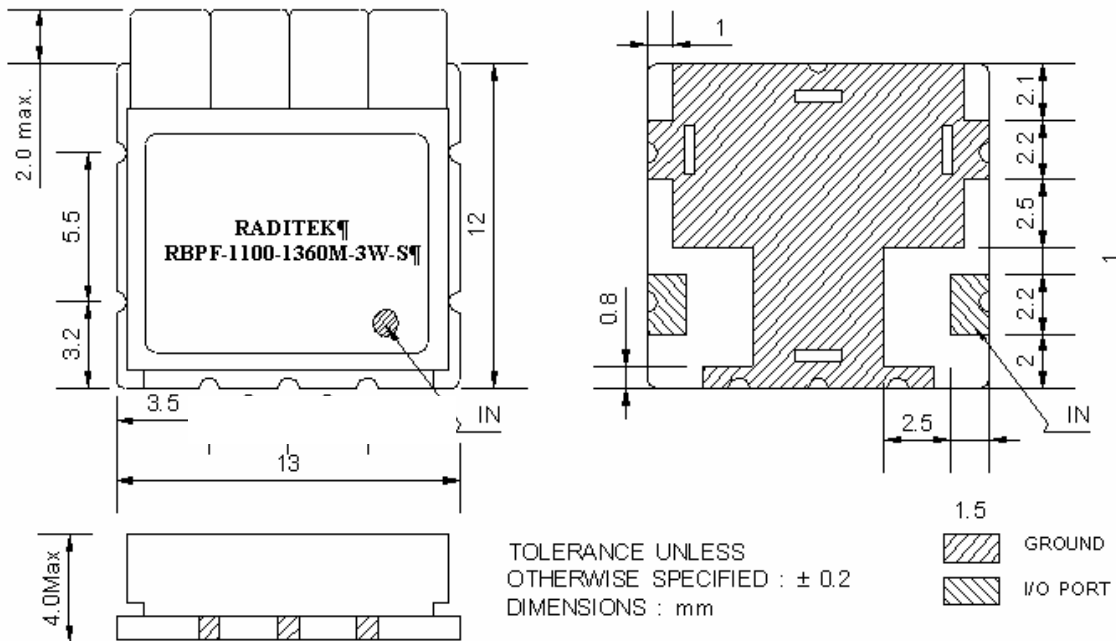

RBPF-1100-1360M-3W-S-k

Specifications may be subject to change

03/28/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com