


RADITEK INC.

Ceramic Band Pass Filter 1985 MHz to 2115 MHz, 5 Watts, Surface Mount RBPF-1985-2115M-5W-S

code-k

DIMENSIONS

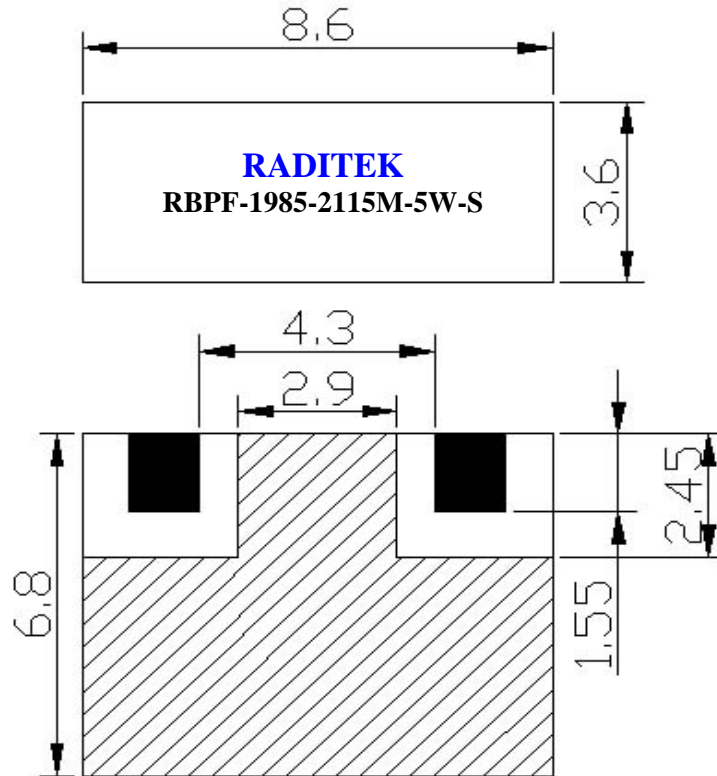

Specifications

Center Frequency	2000	MHz
Bandwidth (BW)	Fo± 15 (1985-2115)	MHz
Insertion Loss	1.5	dB max Typ/Spec
Ripple in BW	0.5	dB max Typ/Spec
Return Loss in BW	15	dB min Typ/Spec
Attenuation	25.0dB min at 1300~1650 35.0dB min at 2350~2750	MHz MHz
Input Power	5	Watt
In/Out Impedance	50	Ω
Operating Temp.	-40 to +85°	Deg C