


RADITEK INC.

Ceramic Band Pass Filter 3700 to 3800 MHz, Model 1012, Surface Mount RBPF-3700-3800M-1012-S-k

code-k

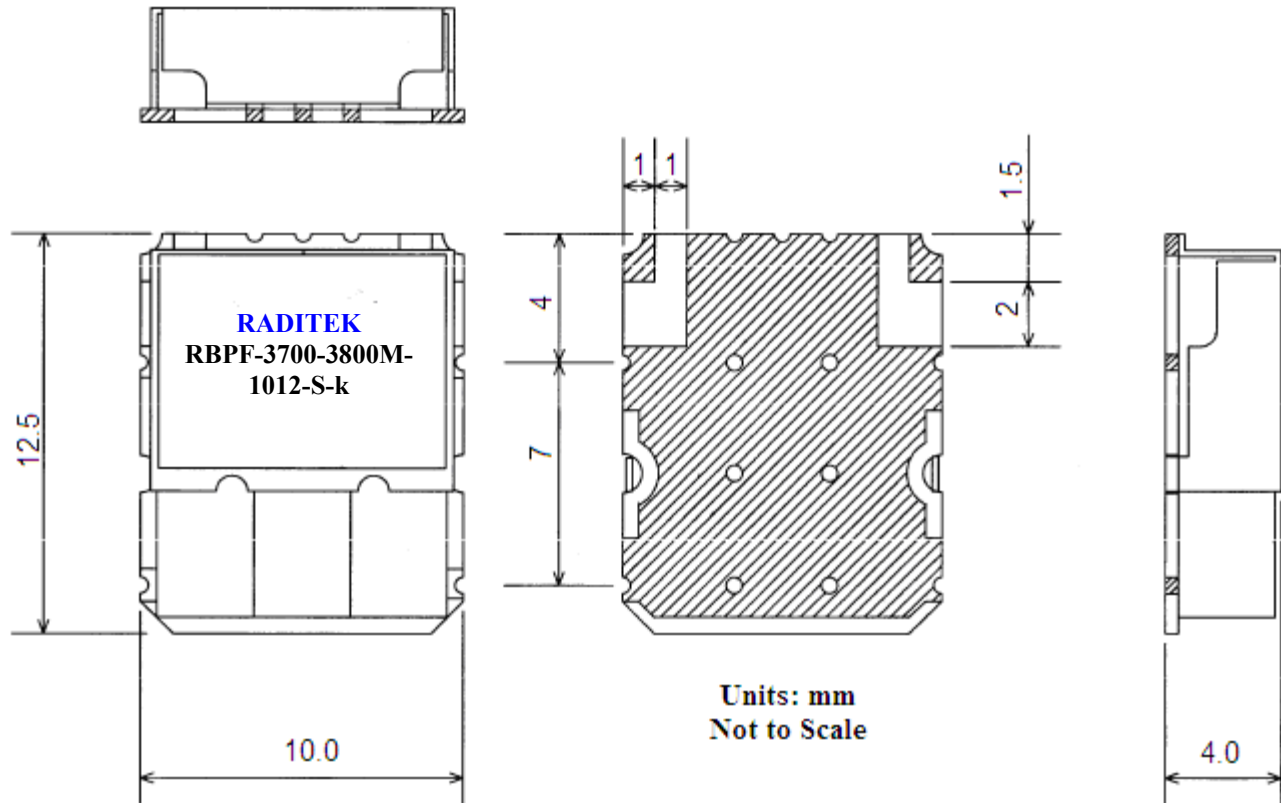

Specifications		Units
Center Frequency (Fo)	3750	MHz
Pole	3	
Bandwidth (BW)	3700-3800	MHz
Insertion Loss	2.0	dB max
Ripple in BW	0.5	dB max
VSWR in BW	1.5	max
Attenuation	40dB min at 3000~3100	MHz
	35dB min at 3350~3450	MHz
	26dB min at 4050~4150	MHz
In/Out Impedance	50	Ω

RBPF-3700-3800M-1012-S-k

Specifications may be subject to change

05/22/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com