

RADITEK INC.

RCBPF-2305-2395M-35dBm(Wi-MaxFilter)

code-z

To meet out of band emissions for 2.3-2.4GHz Wi-Max transmissions, this compact filter is placed between the TX/RX module and the antenna.



Electrical Specifications		Test Data@ Room Temp	Test Data@ 60°C	Units
Pass Band:		2305-2395	2305-2395	MHz
<1	@ 2305-2395MHz	0.54	0.74	dB
60	@ 2030-2250MHz	64.2	64.0	dB
60	@ 2450-2670MHz	63.8	63.3	dB
-30	Outside of 2030-2670MHz, Especially @ 2x1dB passband	<65	<65	dBc
Power Average	35			dBm
Power Peak	47 (50W Peak)			dBm
Operating Temperature	0-60			°C
Connectors (All Ports)	SMA Female			
Size A Option	3.5 x 1.58 x 1.325			Inch
Size B Option	4.0 x 1.125 x 1.58			Inch

RCBPF-2305-2395M-35dBm-z

Specifications may be subject to change

01/17/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com


RADITEK INC.

RCBPF-2305-2395M-35dBm(Wi-MaxFilter)


code-z

To meet out of band emissions for 2.3-2.4GHz Wi-Max transmissions, this compact filter is placed between the TX/RX module and the antenna.

Model A Dimension Inch (mm)

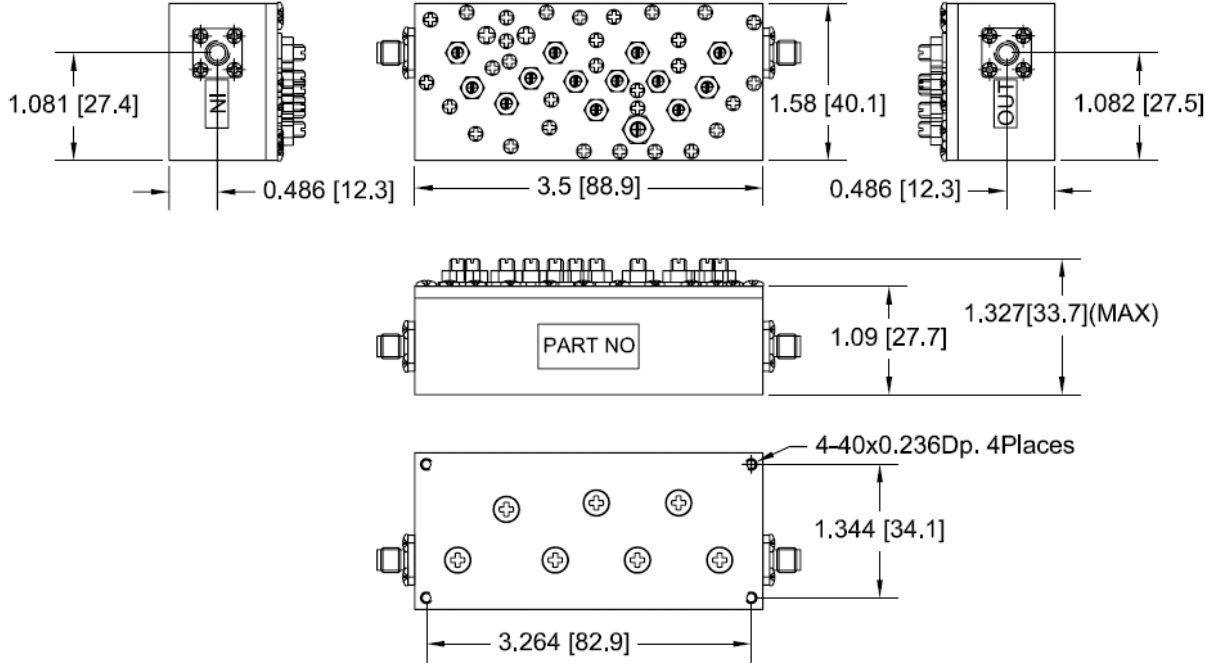

Model B Dimension Inch (mm)

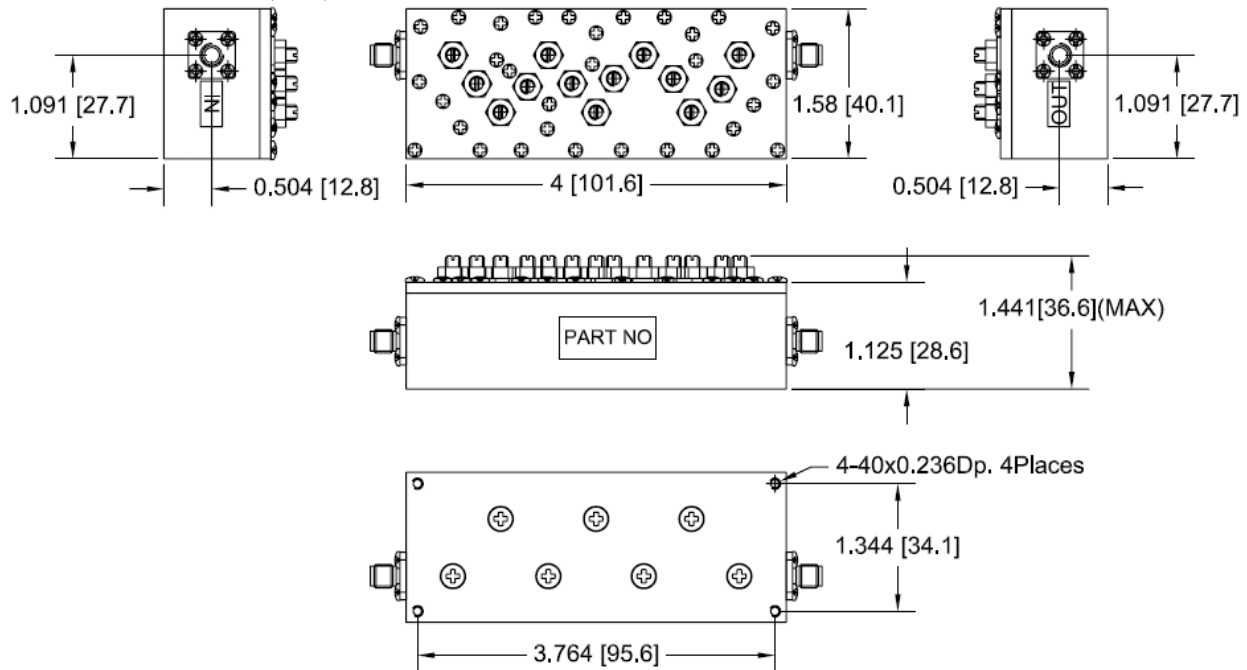

RCBPF-2305-2395M-35dBm-z

Specifications may be subject to change

01/17/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com, E-mail: sales@raditek.com