


RADITEK INC.

DAB Filters

code-k

Band Pass Filter, 1452-1492MHz, Model 0908, 3 Watts, Surface Mount
RBPF-1452-1492M-0908-3W-S-M2-k

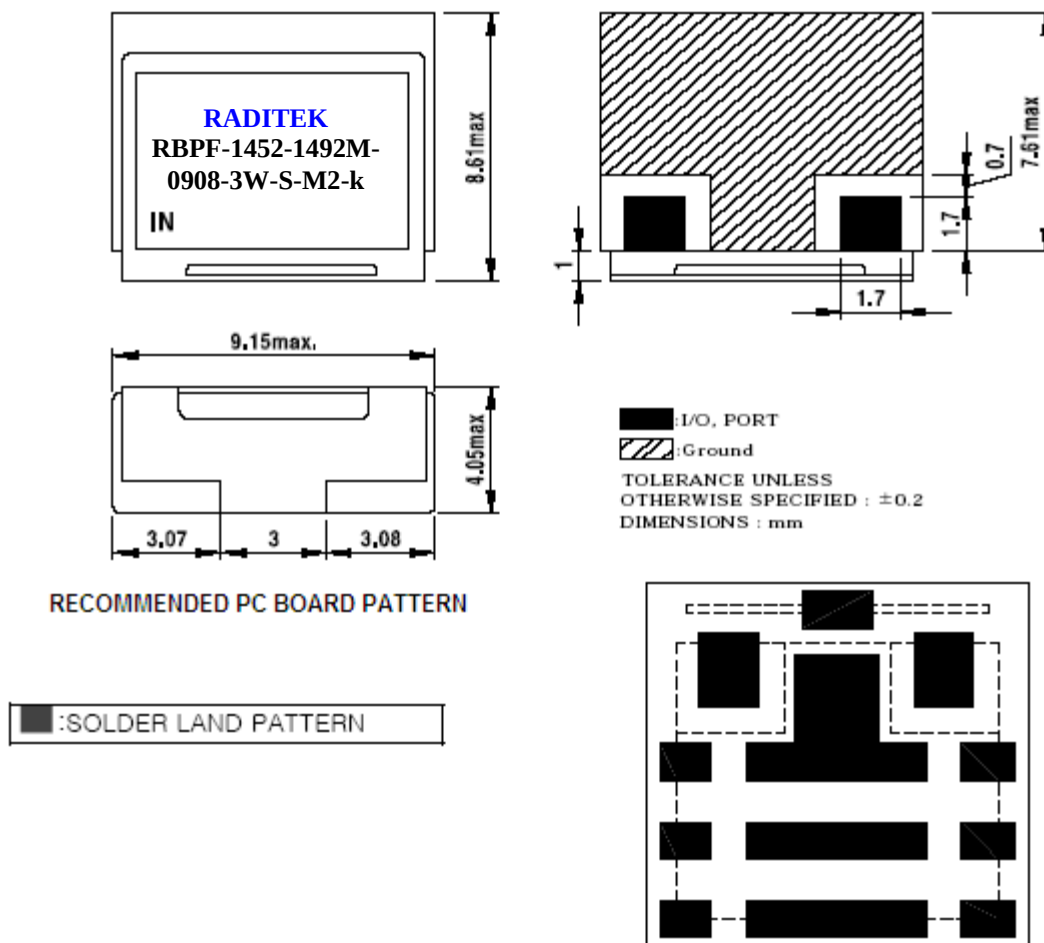

Electrical Specifications		Units
Center Frequency:	1472	MHz
Poles	3	
Bandwidth	$F_0 \pm 20$ (1452-1492)	GHz
Insertion Loss	2.0	dB (max)
Ripple at Bandwidth	0.5	dB (max)
Return Loss	15	dB (min)
Attenuation @1344 MHz	45	dB (min)
@1599 MHz	30	dB (min)
Input Power	3	Watts (max)
In/Out Impedance	50	Ohm
Temperature Range	-30 to +85	°C

RBPF-1452-1492M-0908-3W-S-M2-k **Specifications may be subject to change**

05/22/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com , E-mail: sales@raditek.com