


RADITEK INC.

GSP Filters

code-k

Band Pass Filter, 2630-2655MHz, Model 0605, 3 Watts, Surface Mount
RBPF-2630-2655M-0605-3W-S-M1-k

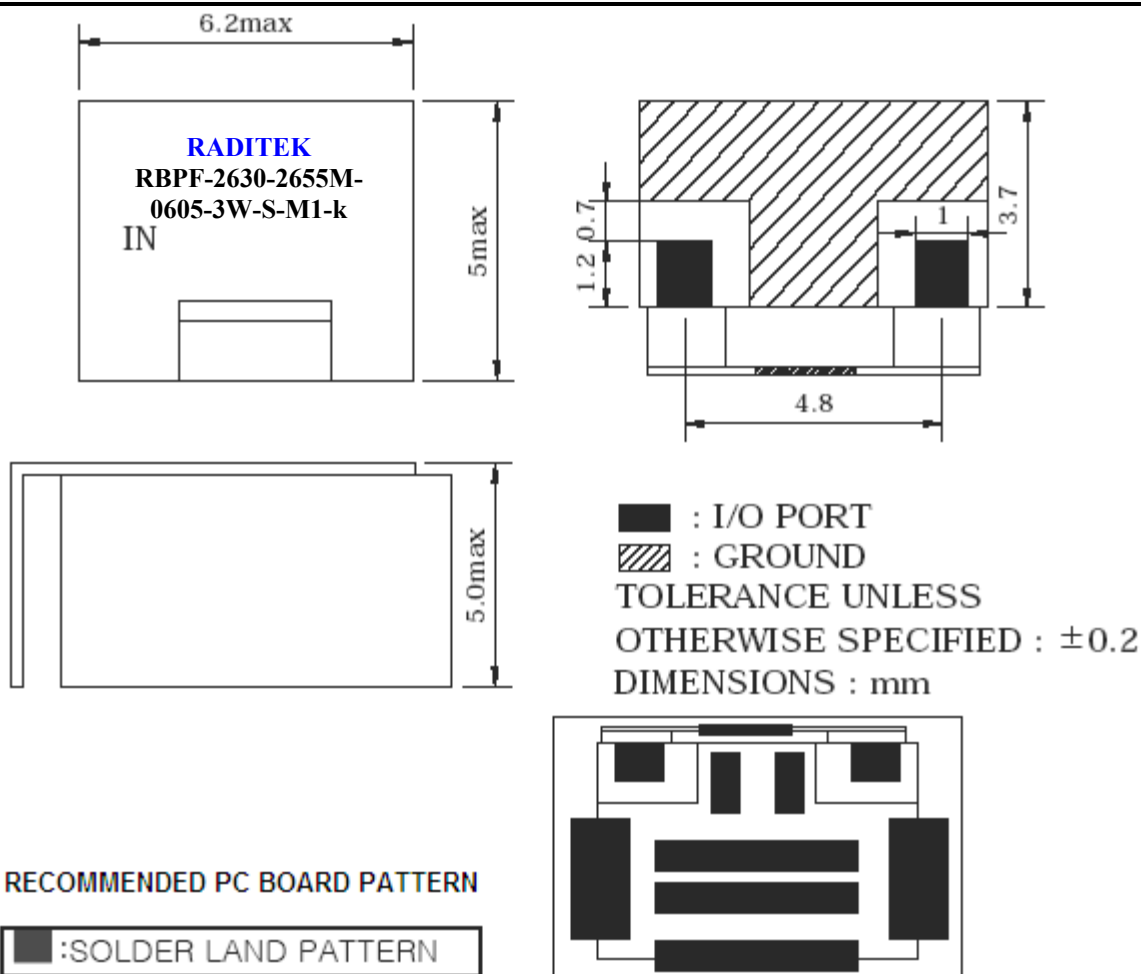

Specifications		Units
Center Frequency	2642.5	MHz
Poles	2	
Bandwidth (BW)	± 12.5	MHz
Insertion Loss	1.5	dB max
VSWR	1.44:1	
Ripple at BW	1.0	dB max
Attenuation	10 dB (min) @ Fo-70	MHz
Input Power	3	Watt
In/Out Impedance	50	Ω
Operating Temp.	-30 to +85	$^{\circ}\text{C}$

RBPF-2630-2655M-0605-3W-S-M1-k **Specifications may be subject to change**

05/23/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com , E-mail: sales@raditek.com