


RADITEK INC.

SMR Filters

code-k

Band Pass Filter, 806-821MHz, Model 4016, 3 Watts, Surface Mount RBPF-806-821M-4016-3W-S-k

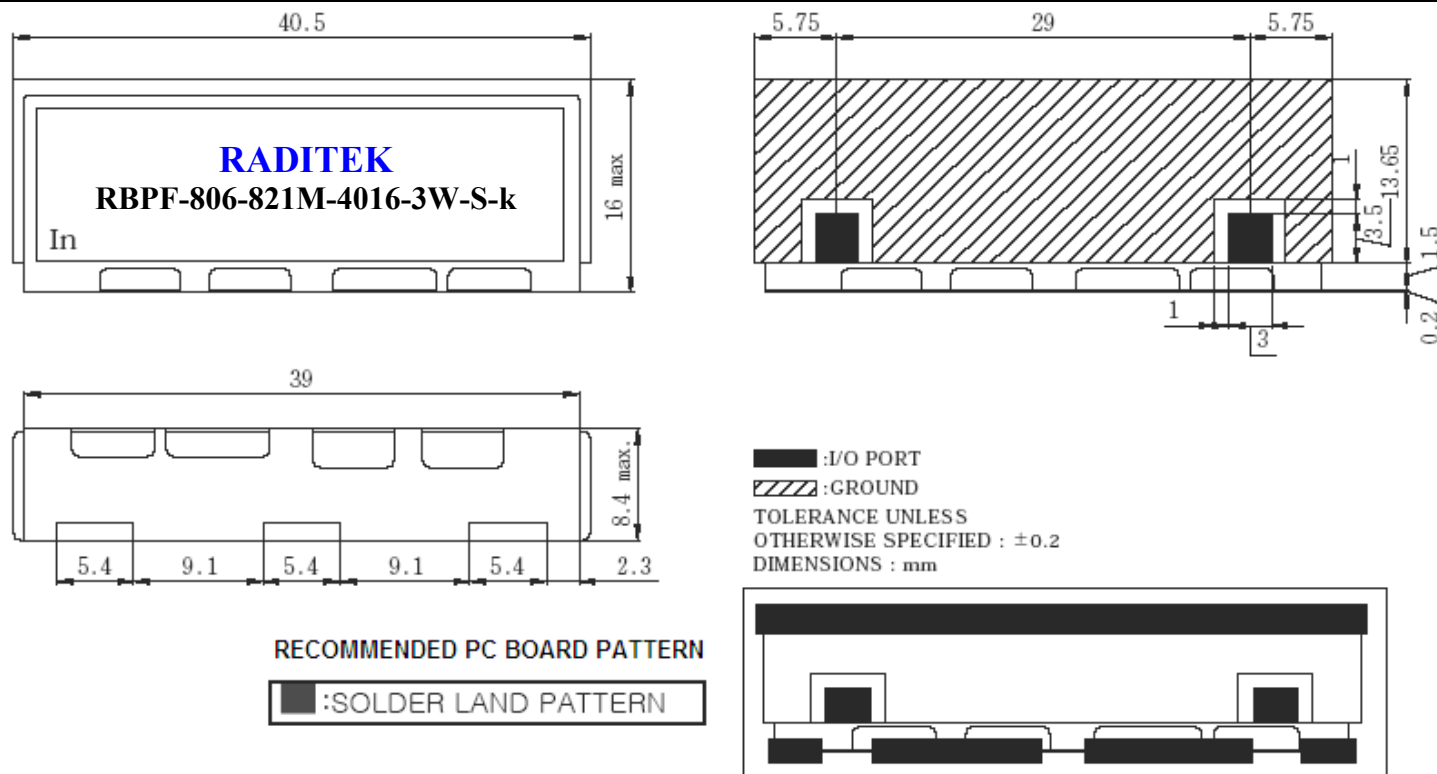

Specifications		Units
Center Frequency	813.5	MHz
Poles	10	
Bandwidth (BW)	± 7.5	MHz
Insertion Loss	3.5	dB max
VSWR	1.29:1	
Ripple at BW	1.0	dB max
Attenuation	60 dB (min) @ 836 60 dB (min) @ 851-866	MHz
Input Power	3	Watt
In/Out Impedance	50	Ω
Operating Temp.	-30 to +85	$^{\circ}\text{C}$

RBPF-806-821M-4016-3W-S-k

Specifications may be subject to change

05/24/08

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: www.raditek.com , E-mail: sales@raditek.com