


RADITEK INC.

Ceramic Band Pass Filter 612MHz to 628MHz, Model 1312, Surface Mount RBPF-612-628M-1312-S-k

code-k

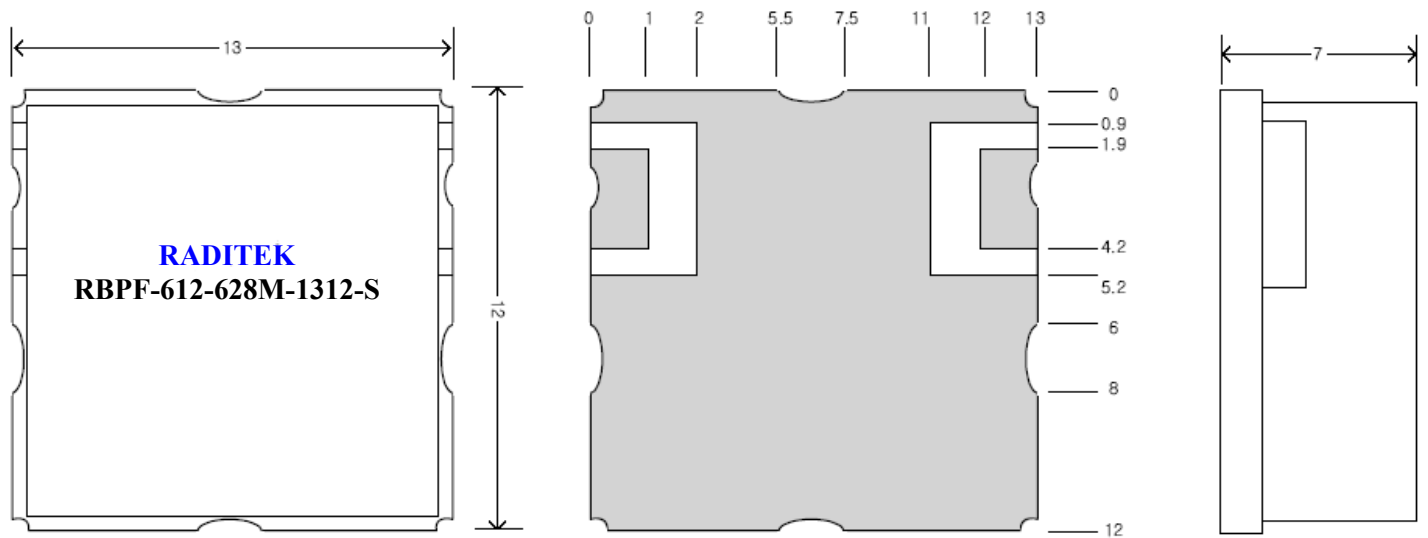

TOLERANCES UNLESS
OTHERWISE SPECIFIED ; +/-0.3
UNIT: mm

Specifications		Units
Center Frequency	620	MHz
Bandwidth	16	MHz
Insertion Loss	3.0	dB max
VSWR	1.4:1	
Ripple	1.0	dB max
Attenuation	30dB @ FC±60MHz	
In/Out Impedance	50	Ω