


Waveguide Isolator 26.5-40 GHz

RADI-26.5-40-WR28-1.5WR (Replacement for HP R365A)

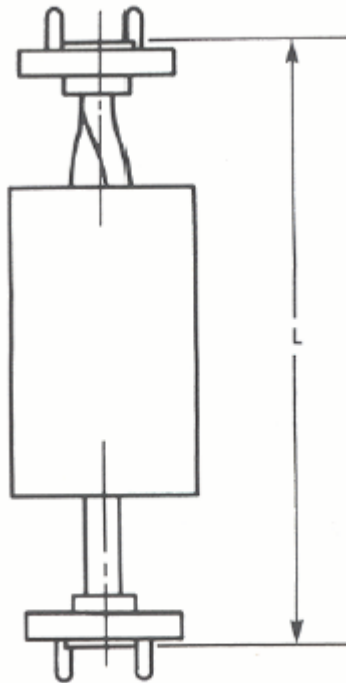

Frequency	26.5-40	GHz
Insertion loss	1.5	dB max
Isolation	25	dB min
VSWR	1.4	:1 max
Waveguide (Flange)	WR-28	
Power (Average)	1.5	Watts
Dimension L	3.3 (83.82)	In. (mm)
Dimension D	TBA	In. (mm)