


2-Way Splitter Combiner, 400-1000MHz, 200 Watts, Drop-In

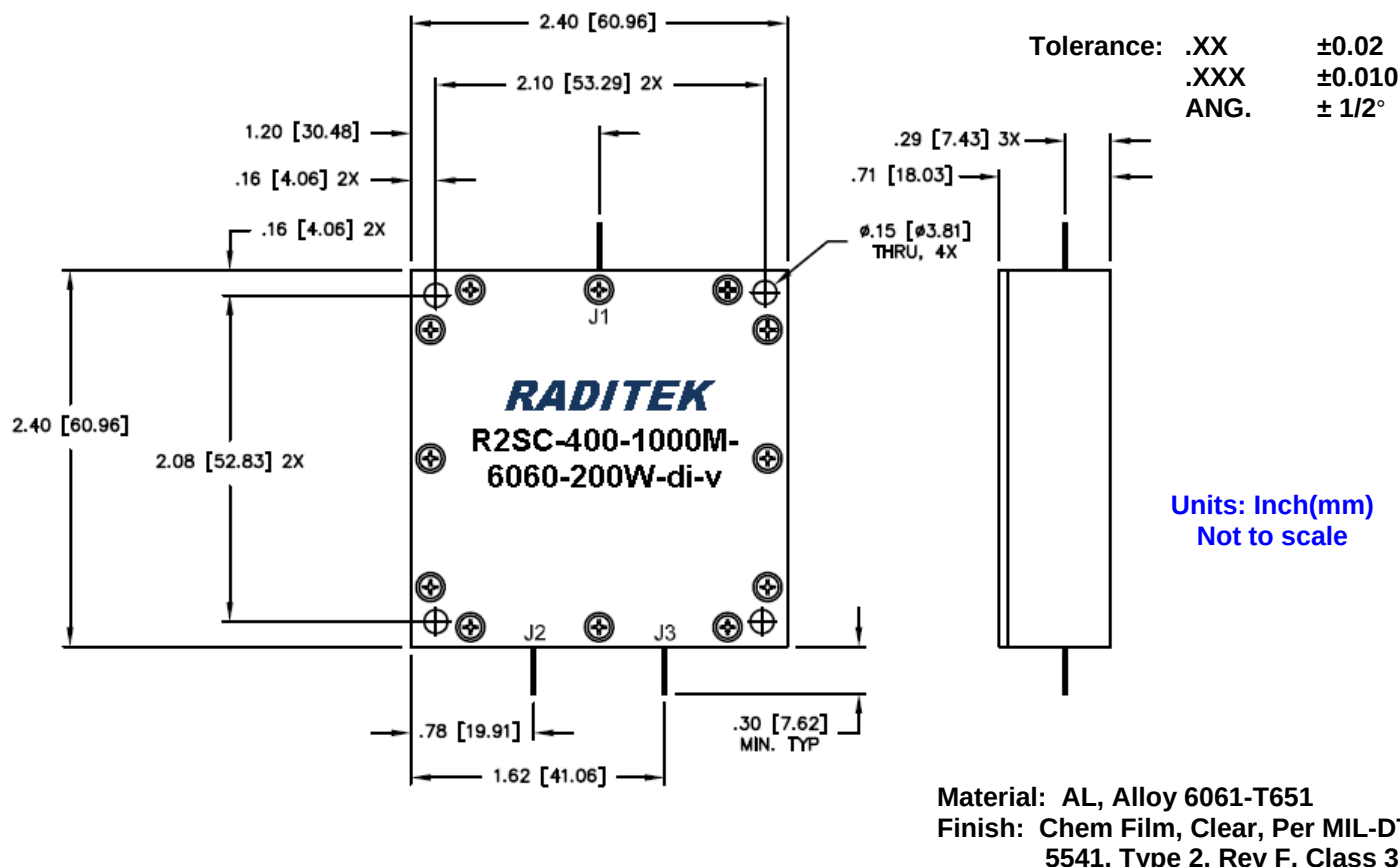

Order Examples: R2SC-400-1000M-6060-200W-di-v

Description: (2-Way Splitter Combiner, 400-1000MHz, Size 60.96x60.96mm, 200 Watts, Drop-In)

Specifications		Units
Frequency	400-1000	MHz
Insertion Loss	<0.5	dB
Isolation	>15	dB
VSWR	<1.25:1	
Phase Balance	±5°	
Amplitude Balance	±0.20	dB
Power	200	Watts
Connectors: J1-J3 PIN Diameter	0.02	In.
Temperature	-55 to 85	°C

R2SC-400-1000M-6060-200W-di-v Specifications may be subject to change

11/11/10

WORLD HQ: 1702L Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Tel: (408) 266-7404

FAX: (408) 266-4483

WEB: www.raditek.com

E-mail: sales@raditek.com