


N-Coaxial Attenuators (N50W Medium Power)

N" COAXIAL ATTENUATORS (N 50 Watts Medium Power)

DIMENSIONS

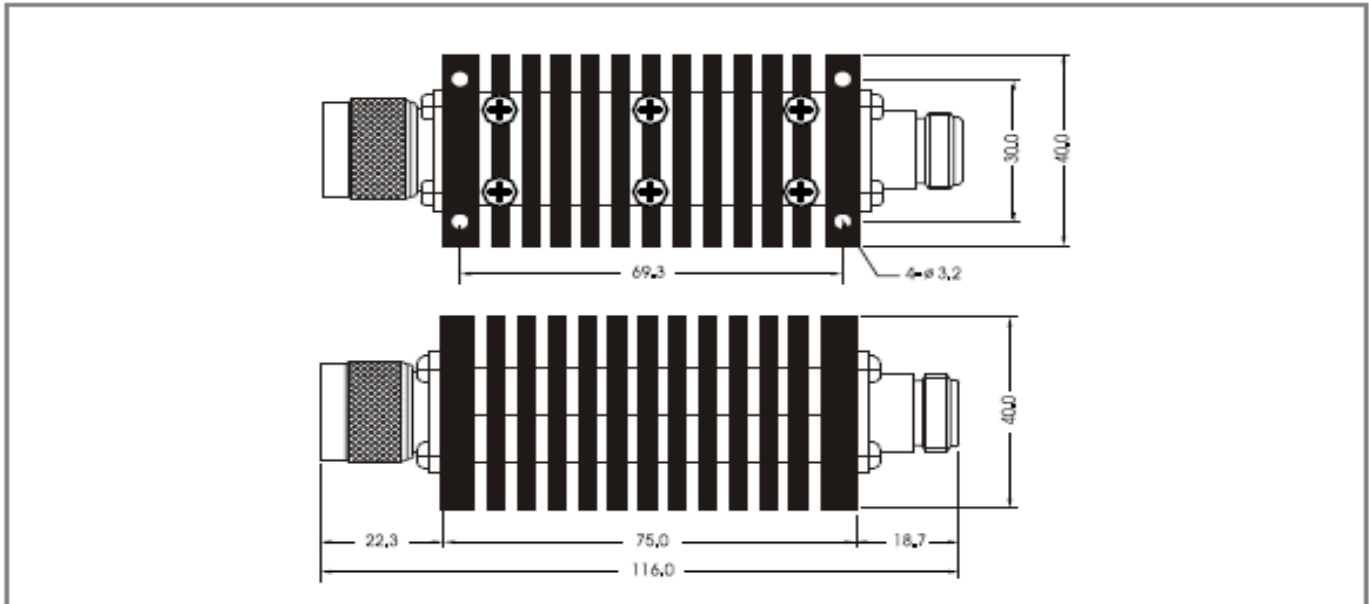

ELECTRICAL DATA

PART NO.	Frequency Range(GHz)	ATTENUATION(dB)				V.S.W.R			Power(W)		Weight (Max) (g)
		Nominal	DEVATION			DC-1	1-2	2-4	avg.	peak	
			DC-1	1-2	2-4						
M 750-032	DC-1	3	±0,50			≤1,10			50	5000	280
M 750-033		6	±0,50			≤1,10			50	5000	280
M 750-034		10	±0,50			≤1,10			50	5000	280
M 750-035		20	±0,70			≤1,10			50	5000	280
M 750-036		30	±0,70			≤1,10			50	5000	280
M 750-037	DC-2	3		±0,60		≤1,10	≤1,25		50	5000	280
M 750-038		6		±0,60		≤1,10	≤1,25		50	5000	280
M 750-039		10		±0,60		≤1,10	≤1,25		50	5000	280
M 750-040		20		±1,00		≤1,10	≤1,25		50	5000	280
M 750-041		30		±1,00		≤1,10	≤1,25		50	5000	280
M 750-042	DC-4	3			±0,70	≤1,10	≤1,25	≤1,35	50	5000	280
M 750-043		6			±0,70	≤1,10	≤1,25	≤1,35	50	5000	280
M 750-044		10			±0,70	≤1,10	≤1,25	≤1,35	50	5000	280
M 750-045		20			±2,00	≤1,10	≤1,25	≤1,35	50	5000	280
M 750-046		30			±2,00	≤1,10	≤1,25	≤1,35	50	5000	280