

# RADITEK INC.


## Ceramic Band Pass Filter 1250-1380MHz, 3 Watts, Surface Mount RBPF-1250-1380M-3W-S

code-k

### 1. ELECTRICAL SPECIFICATION.

Center Frequency (Fo)		1315MHz		
Band Width (B.W)		1250MHz	~	1380 MHz
NO	CHARACTERISTIC	TYP		SPEC
1	INSERTION LOSS(dB)	Fc=1.8 max.		
2	RIPPLE in BW(dB)	1.0 max.		
3	Return Loss in BW	15 dB min.		
4	IN/OUT IMPEDANCE	50 Ω		
5	ATTENUATION (Absolute Value)	60	dB min.	AT 800MHz
		20	dB min.	AT 1600MHz
		SPEC+DIM □□		
6	In/Out Power	3 W MAX		

### 2. DIMENSION

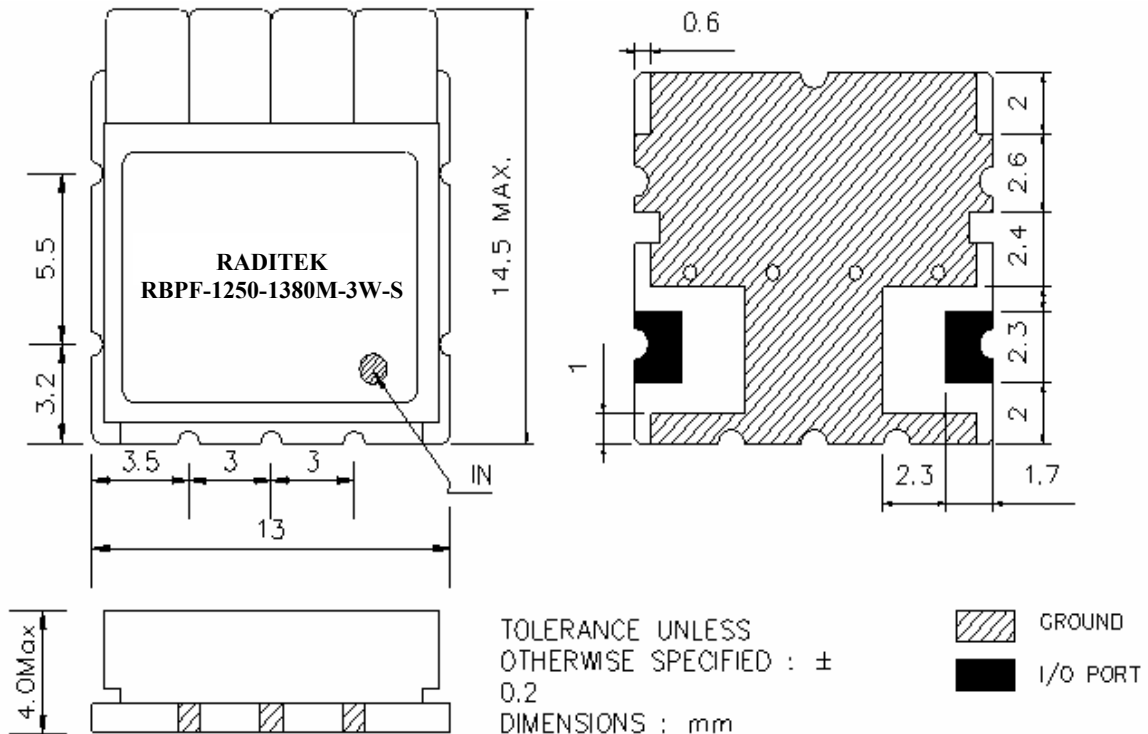

RBPF-1250-1380M-3W-S-k

Specifications may be subject to change

03/28/07

WORLD HQ: 1702H Meridian Ave. Suite 127, San Jose, Ca 95125, U.S.A.

Telephone: (408) 266-7404 FAX: (408) 266-4483

WEB: [www.raditek.com](http://www.raditek.com), E-mail: [sales@raditek.com](mailto:sales@raditek.com)